

Specifications



| | |
|--------------------------|--------------------------------------|
| Input Coil Voltage | 24 VAC |
| Output Rating | 10A @ 240 VAC 10A @ 24 VDC |
| Contact Material | Silver Alloy |
| Relay Type | Double Pole Double Throw (DPDT) |
| Expected Mechanical Life | 50 million cycles |
| Expected Electrical Life | 100,000 @ max current/voltage rating |

Mechanical Characteristics

- Operate time: 25msec
- Release time: 25msec
- Operation Frequency: 10,000/hour
- Dielectric Separation: 2,000 VAC for 1min
- Ambient Operation Temp: -40 to +70 degC
- Ambient RH operation: 35 to 85% RH

Electrical Characteristics

- Double Pole Double Throw (DPDT)
- 10 amp contacts
- Up to 250 VAC switching

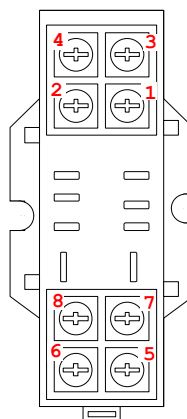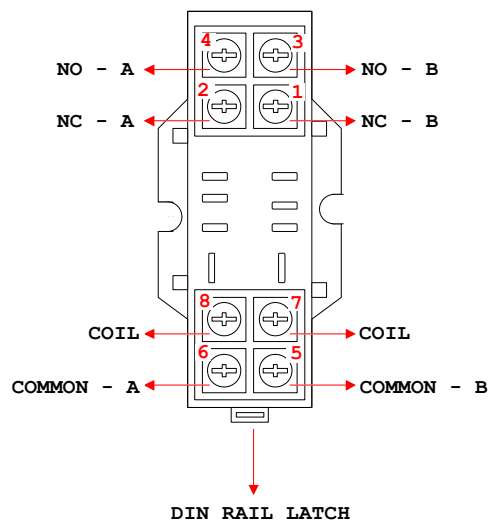

RELAY PINOUT

1. NC - B
2. NC - A
3. NO - B
4. NO - A
5. COMMON - B
6. COMMON - A
7. 24 VAC COIL
8. 24 VAC COIL

